




ITALINTO

AUTOMATIC COLOR DISPENSER

i450

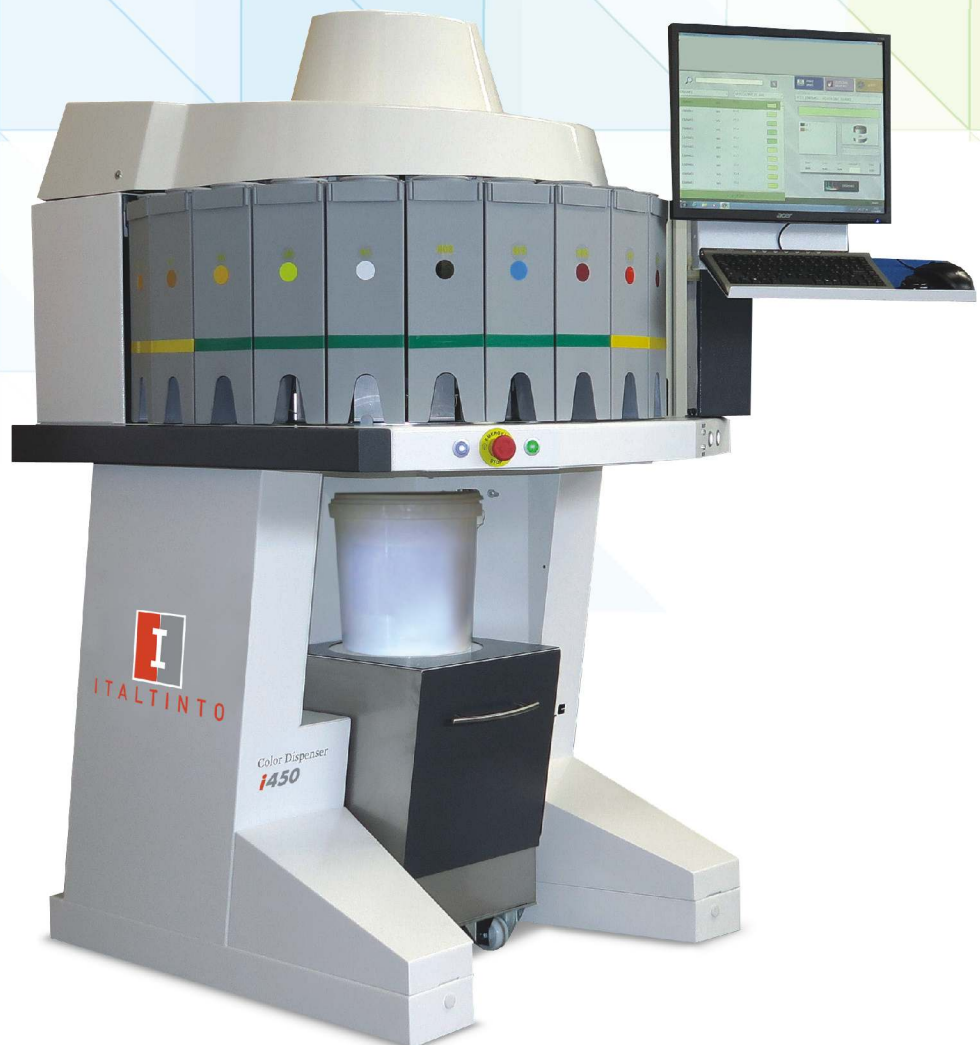

AUTOMATIC COLOR DISPENSER

i450



HIGH PERFORMANCE TINTING MACHINE

The i450 combines cutting-edge dispenser technology with eye-catching design adding value for every paint shop. Its embedded rotating canister array makes refilling quick and easy, even in a confined paint booth. Combinations of canisters allow you to manage high and low colorant consumption patterns. With maximum 24 canisters and simultaneous dispensing, the i450 is a fully integrated Tinting machine that delivers high productivity and flexibility for paint companies to service their end-customers.

TECHNICAL FEATURES

DISPENSING MODE	Simultaneous (up to six colorants)
ACCURACY	Down to 1/384 fl. oz (0.077 ml)
DISPENSING SPEED	Up to 1.4 Ltr/min
NUMBER OF CANISTERS	Up to 24
CANISTER CAPACITY	3 Ltr or 6 Ltr
PUMP	Stainless steel 2 fl. oz. or 4 fl. oz. (60 ml or 120 ml)
COLORANT STIRRING	Fish Tail Mixing Technology
CAN SENSOR	Standard
CAN TARGET LIGHT	Yes
CAN HANDLING	Automatic can shelf
AUTOMATIC DROP STOP	Standard
MAXIMUM CAN DIMENSIONS	380 W x 550 D x 390 H mm (15.0 W x 21.7 D x 15.4 H in)
COMPATIBILITY	Water / Universal / Solvent Based Colorants
POWER SUPPLY	Single Phase 110 – 120 V / 220 – 240 V
MACHINE NET WEIGHT	298 kg (657 lb)
MAXIMUM MACHINE SIZE	973 W x 1021 D x 1705 H mm - Gross Weight 316 kg (38.3 W x 40.2 D x 67.1 H in) - Gross Weight 696 lbs
SHIPPING SIZE	1100 W x 1100 D x 1900 H mm (43.3 W x 43.3 D x 74.8 H in)
SAFETY	CE, cMET
SOFTWARE	ITALTINTO PRO.SCAN dispenser software
OPTIONS	Customized software solutions are available. Connectivity of hardware for External software is available



WHY CHOOSE i450

- High-speed simultaneous colorant dispensing.
- Small footprint.
- Customised canisters capacity.
- Rotating canister array for easier front colorant refilling.
- Single motor controlling entire dispensing system.
- No tubing system.
- Low maintenance.
- Low cost of operation and ownership.



www.italtinto.com

¹⁾ Screen and computer peripherals shown for illustration only.

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Italtinto makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Italtinto's products for its particular applications. *Nothing included in this information waives any of Italtinto's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual / industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. For additional information, please contact Italtinto.

ITALTINTO EUROPE SRL
☎ +39 02 90005234
sales.europe@italtinto.com

ITALTINTO EQUIPMENTS PVT. LTD.
☎ +91 9821507298
sales.amea@italtinto.com

ITALTINTO USA CORPORATION
☎ +1 980 329 8962
sales.na@italtinto.com

ITALTINTO LATIN AMERICA
☎ + 55 11 2698 0464
sales.latam@italtinto.com